



# **RP420 Series**

## **Mac Driver Installation & Mac Printing Setup Guide**



---

# Mac Driver Installation


## I. Mac Driver Installation

Pls insert our USB and it will show NO NAME in MAC desktop:





Pls click it -> Mac-> RTLabelPrinterDriverInstall\_ForMac->

RTLabelPrinterDriverInstall\_ForMac.pkg, pls double click below driver icon:




Then, it will show as below picture,click continue

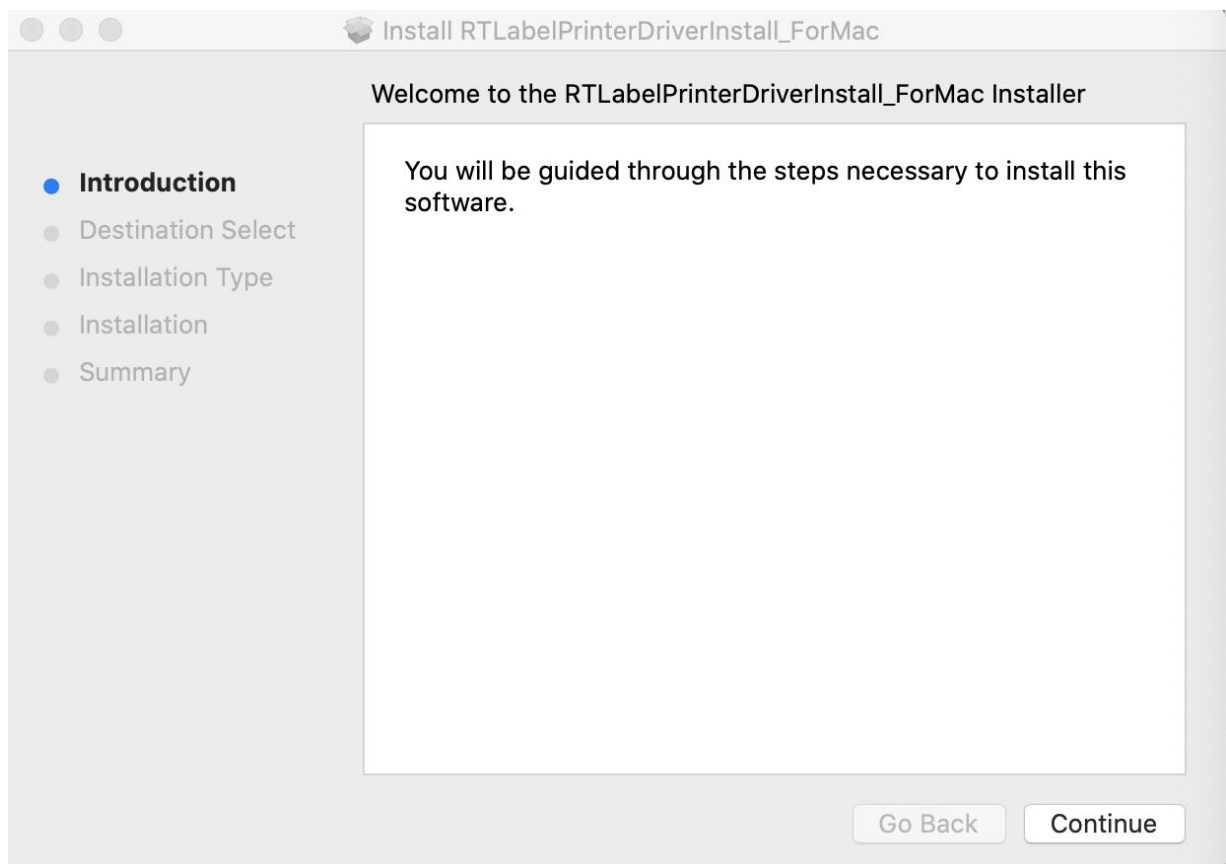

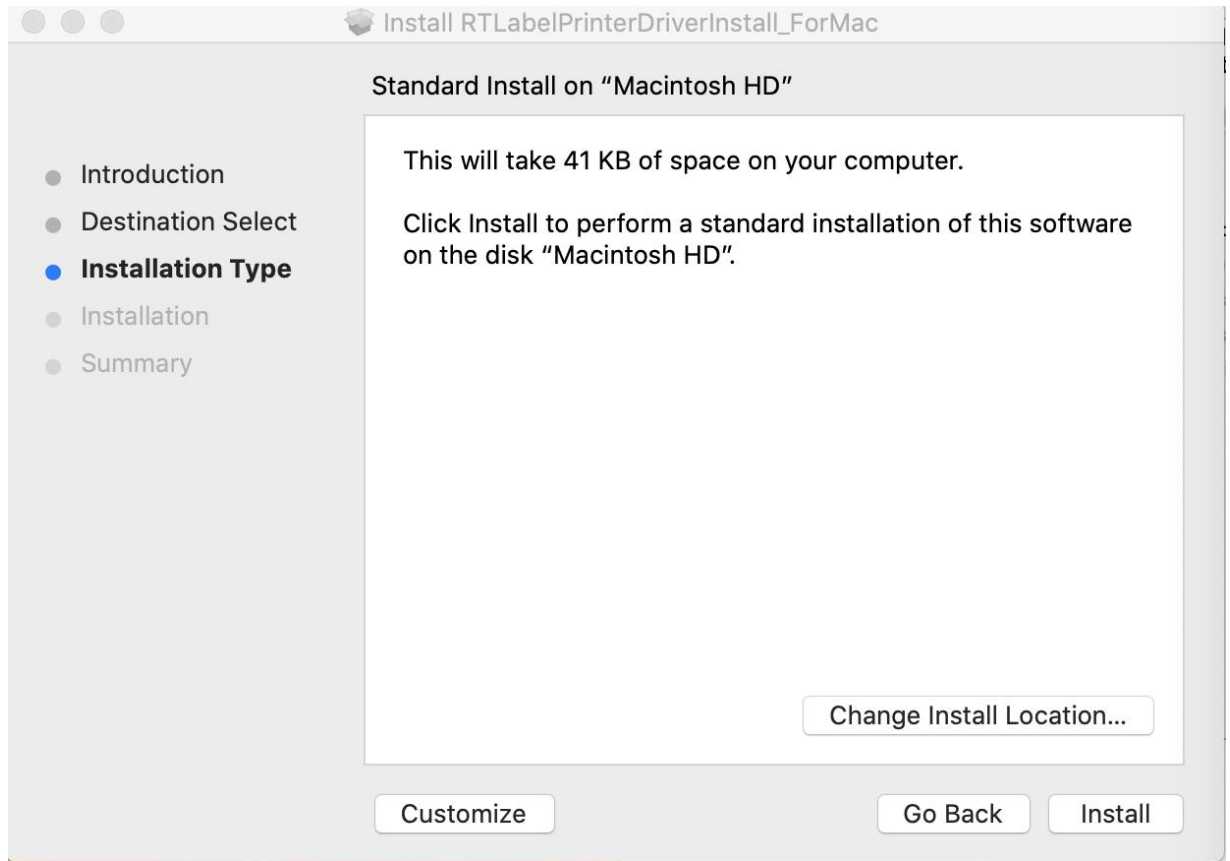


Click "Install", and then it will show as below:

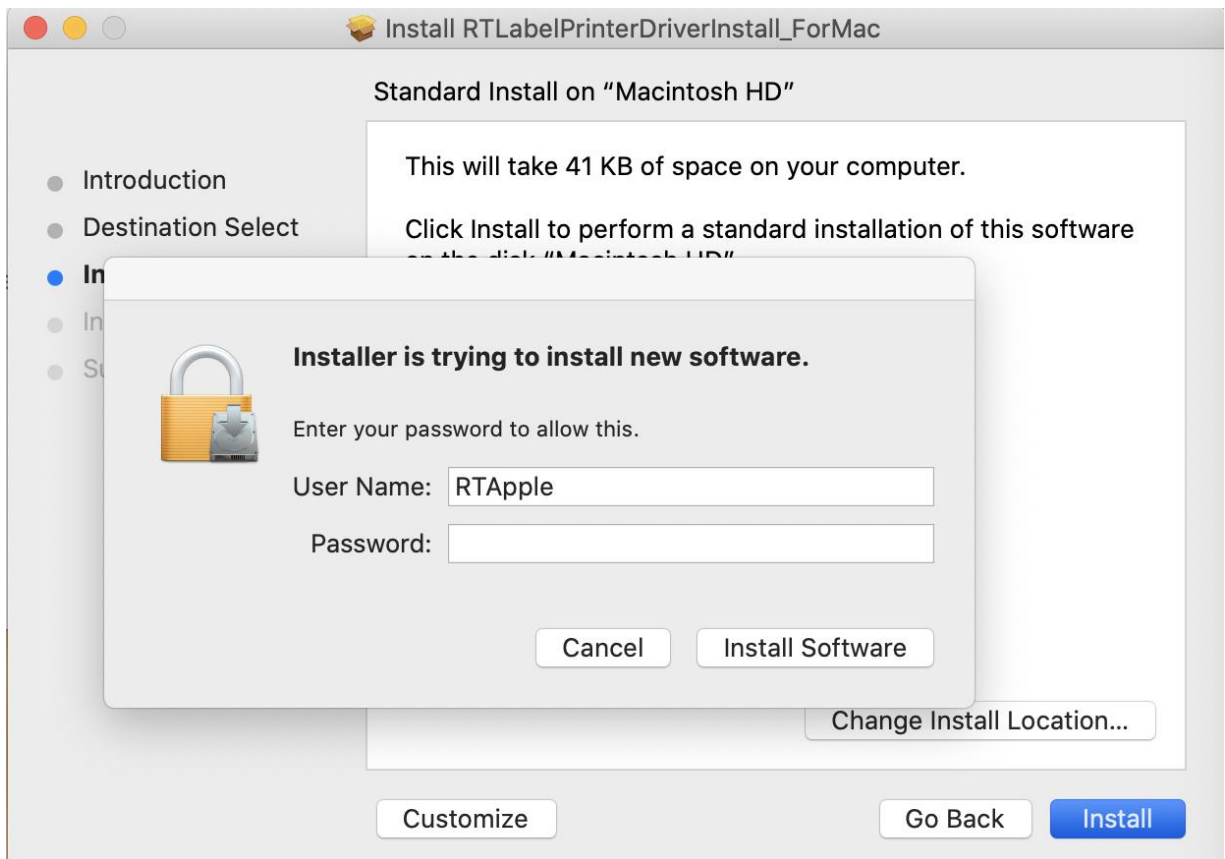

It will make the pop-up dialog as the picture. It asks the users for a username and password. Please enter the correct the Username and the Password, and then click "Install Software".

Then it will show as below:

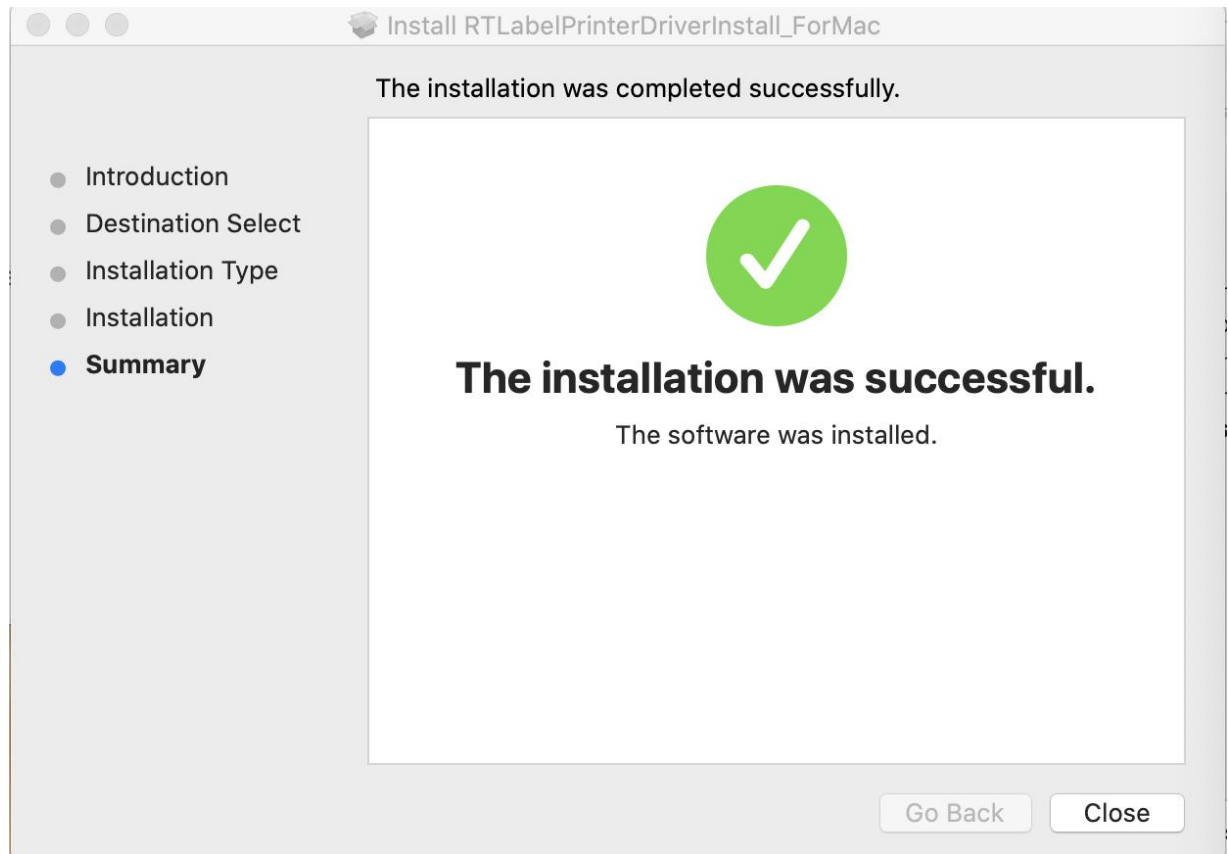


It shows the driver is installed successfully.

## II. Add the Printer


At this moment, the driver has installed. In addition, it needs to add the printer on Mac .

## III. Add the RP4xx Series Printer


Firstly, select “System Preferences...” and open it.

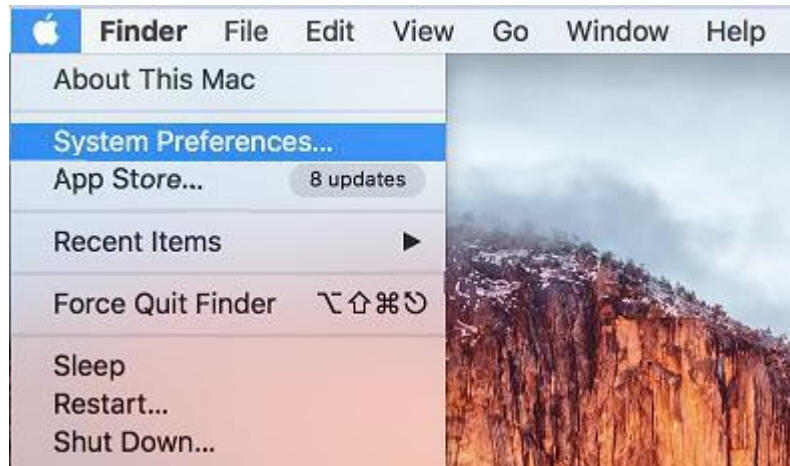


It will show as below:

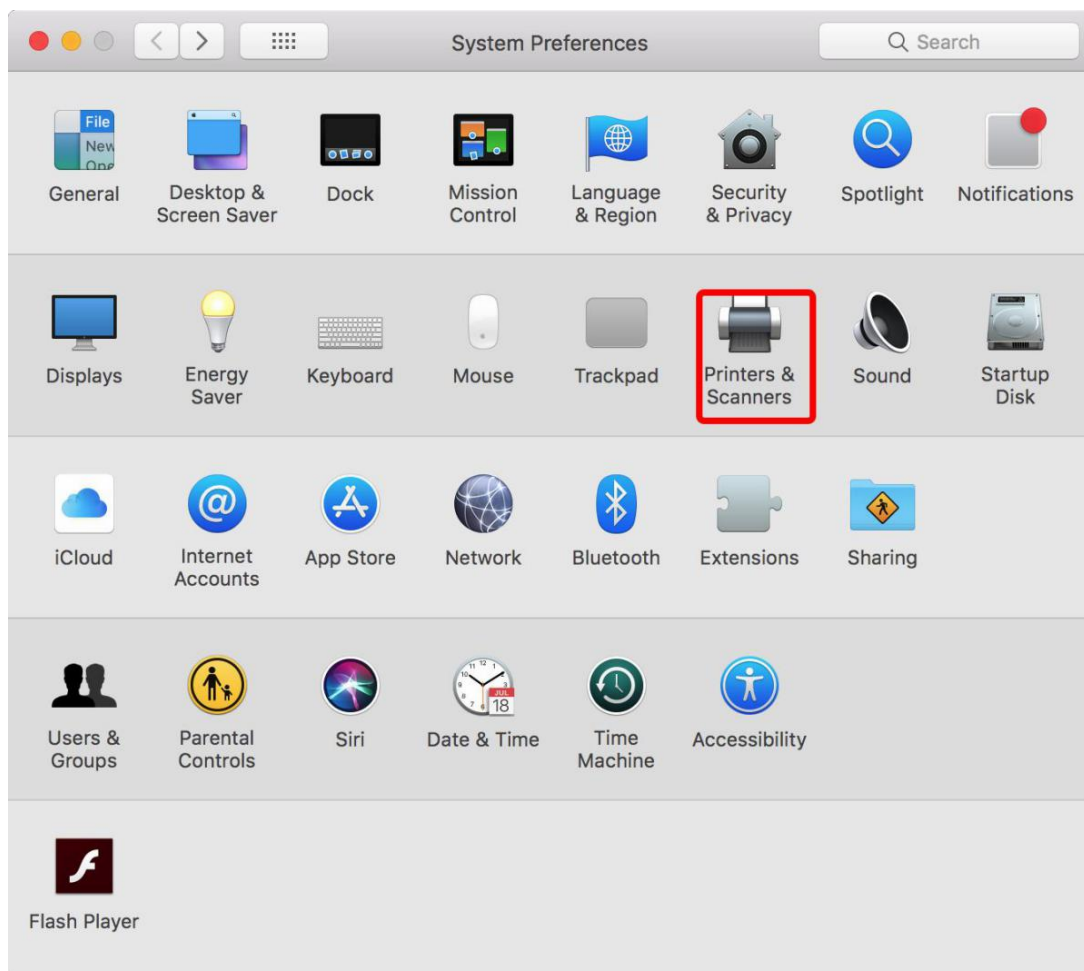

Please select “Printers & Scanners” and open it. Then, it will show as below:

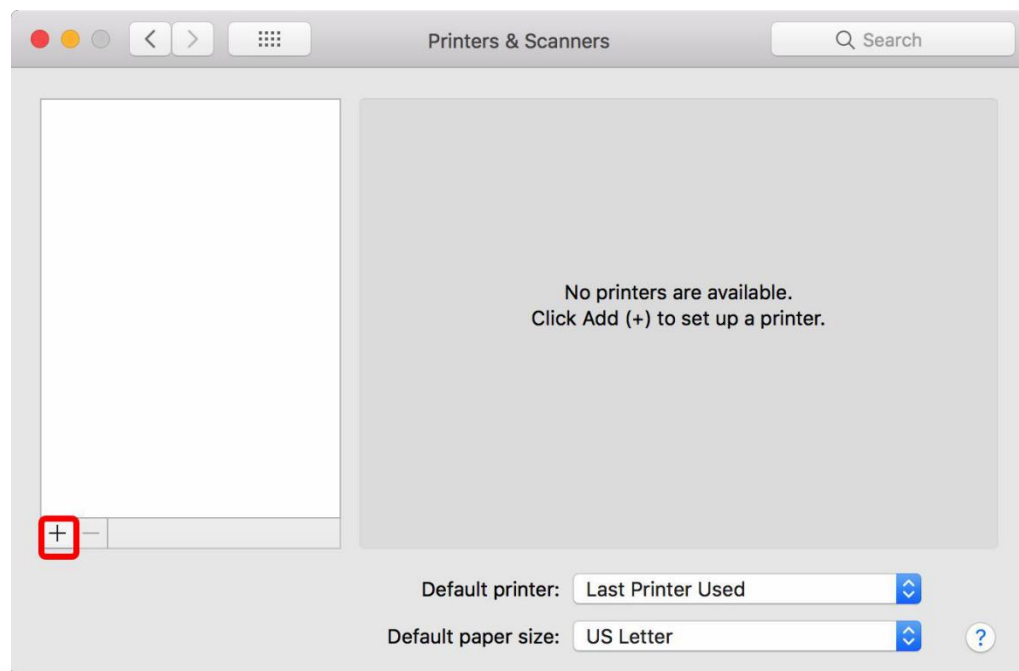


Please click “+”, it will show as below:

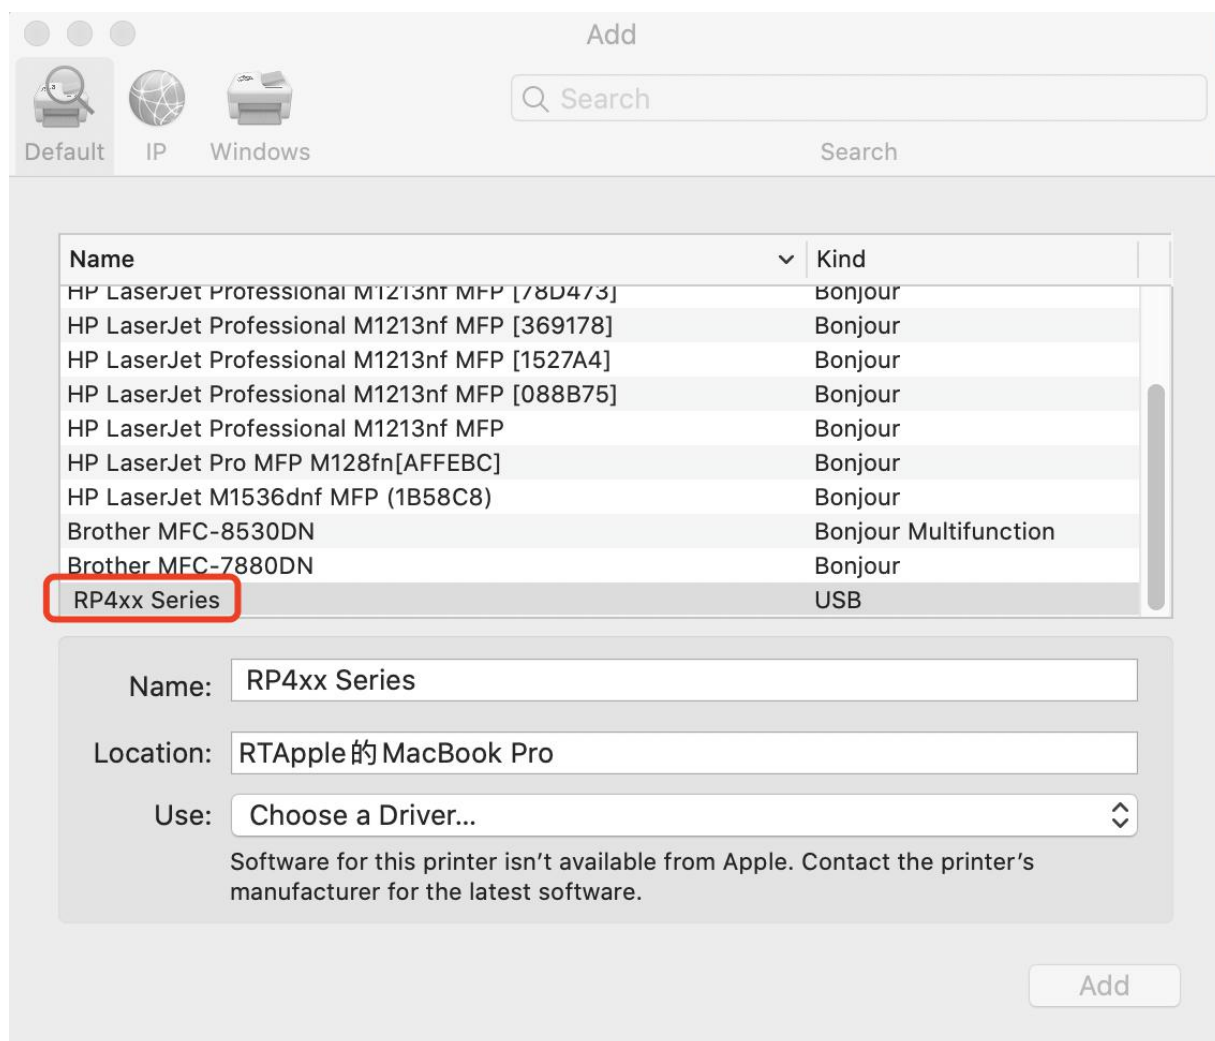


Please select "RP4xx Series" ,

**(Noted: If RP4xx SeriesB2 not show up in Mac after installed,pls re-connect the usb cabel to your mac ,It is important. It does not mean it can't work.)**


Add




Default



IP



Windows

 Search

Search

Name	Kind
HP LaserJet Professional M1213nf MFP [8DA36E]	Bonjour
HP LaserJet Professional M1213nf MFP [78D473]	Bonjour
HP LaserJet Professional M1213nf MFP [369178]	Bonjour
HP LaserJet Professional M1213nf MFP [1527A4]	Bonjour
HP LaserJet Professional M1213nf MFP [088B75]	Bonjour
HP LaserJet Professional M1213nf MFP	Bonjour
HP LaserJet Pro MFP M128fn[AFFEBC]	Bonjour
HP LaserJet M1536dnf MFP (1B58C8)	Bonjour
Brother MFC-8530DN	Bonjour Multifunction
Brother MFC-7880DN	Bonjour
<b>RP4xx Series</b>	USB

Name: RP4xx Series


Location: RTApple 的 MacBook Pro

Use: Rongta RP4xx

Add




Click “Add”. and the RP4xx Series will be added as below.

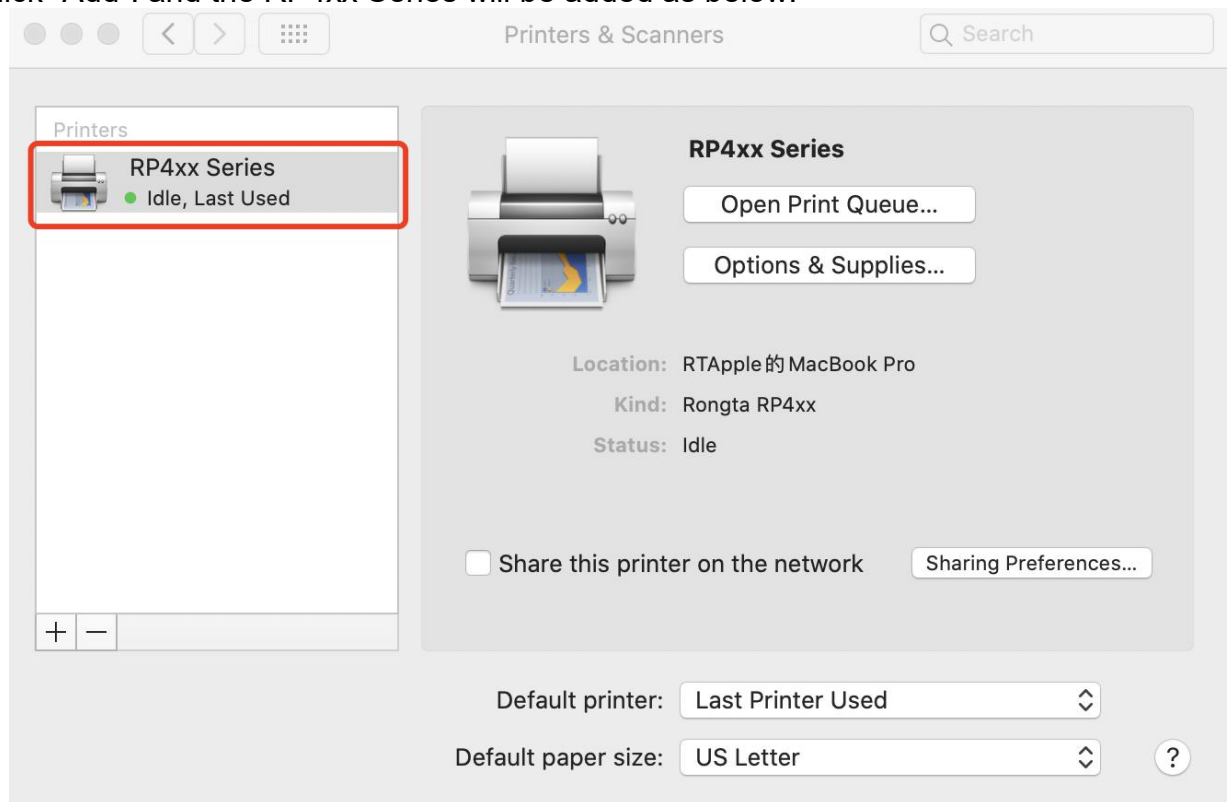


## IV. Check the Printer


After added the Printer, you can printing something to check if the printer connects the Mac. Please open the “4x4 (100x100mm) sample label” from USB and you will see below picture :

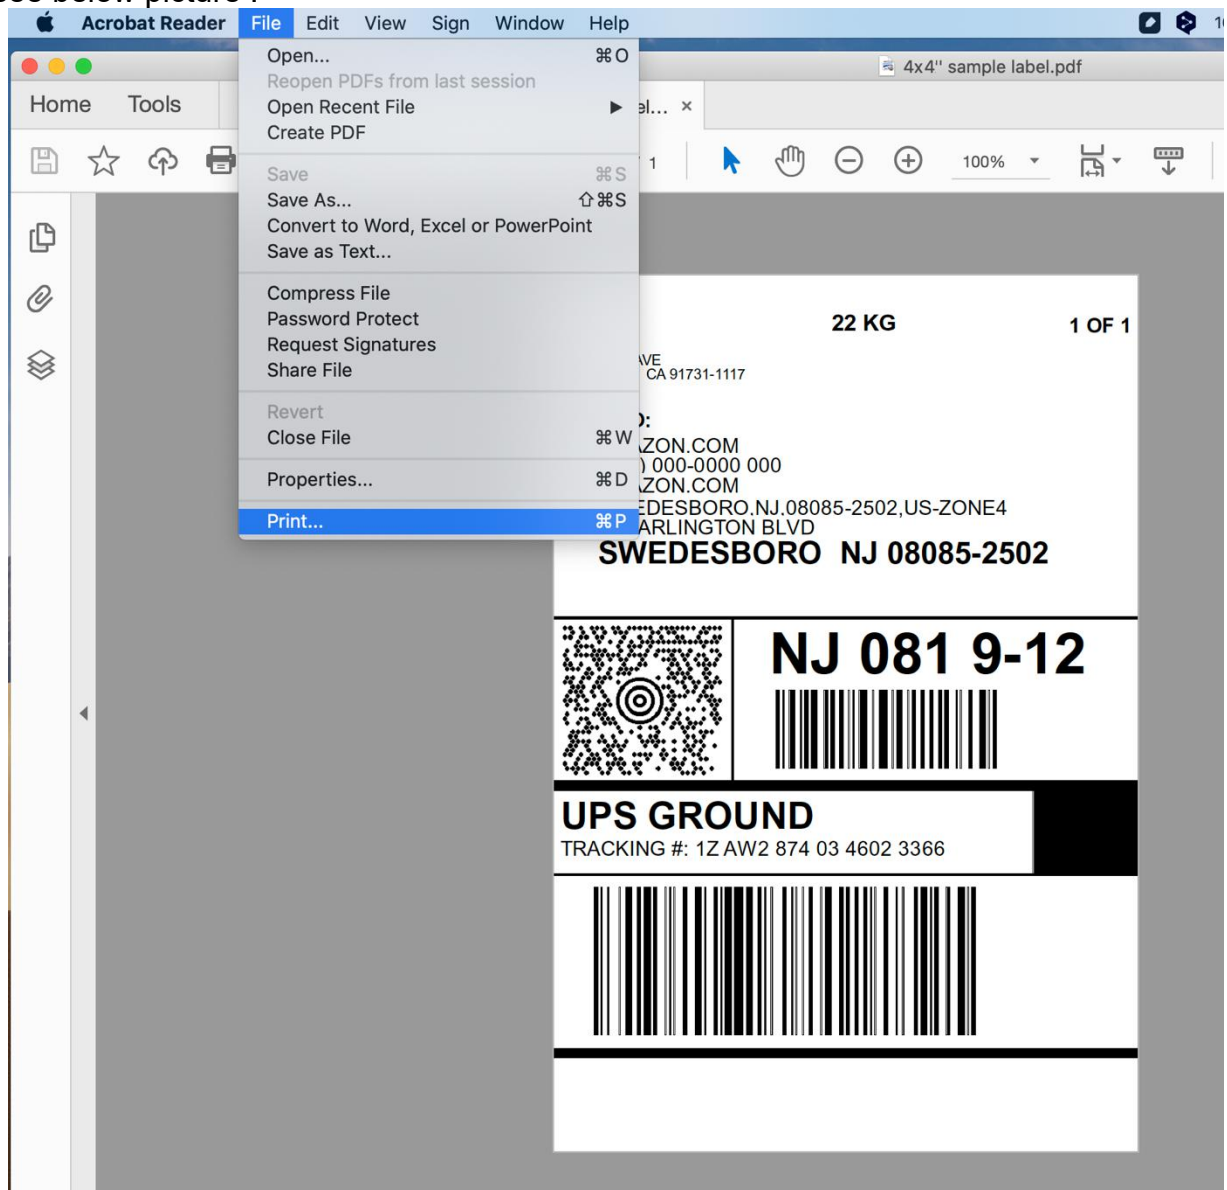

Then click “File” to select “Print...” It will show as below:

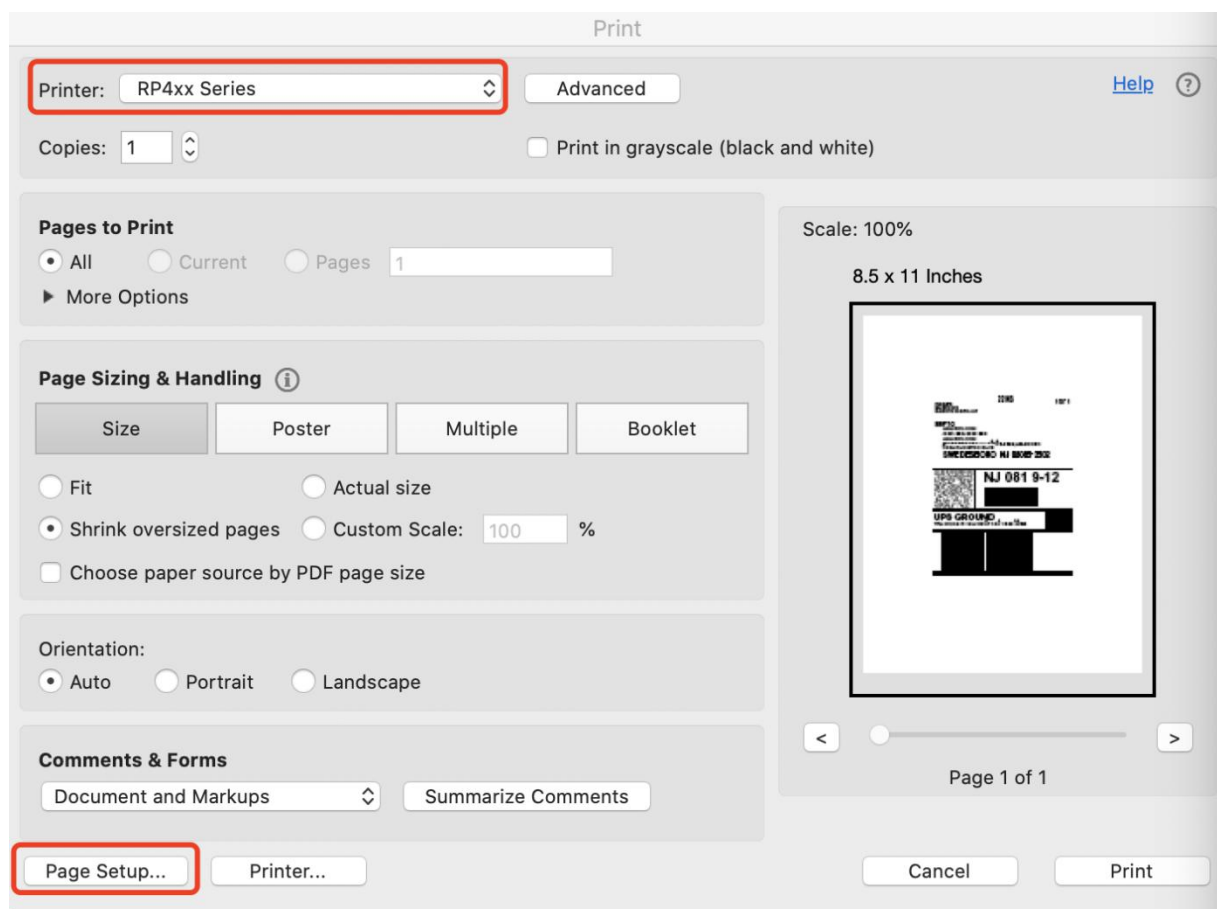


Pls select “RP4xx Series” and click “Page Setup...”,it will show below picture:

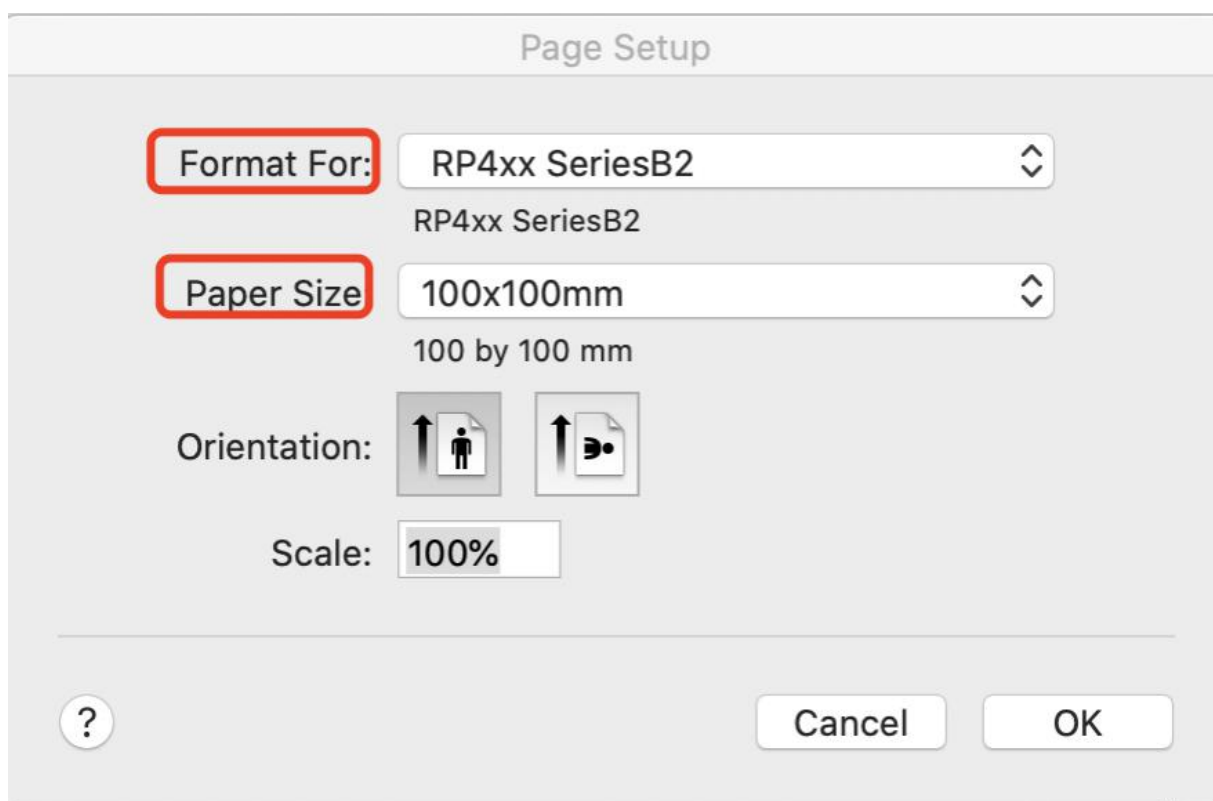

Pls select "RP4xx Series" and select the correct "Paper Size" to match your label size and it will show as below:

The default setting with millimeter like 100X100mm size mean 4X4" size !

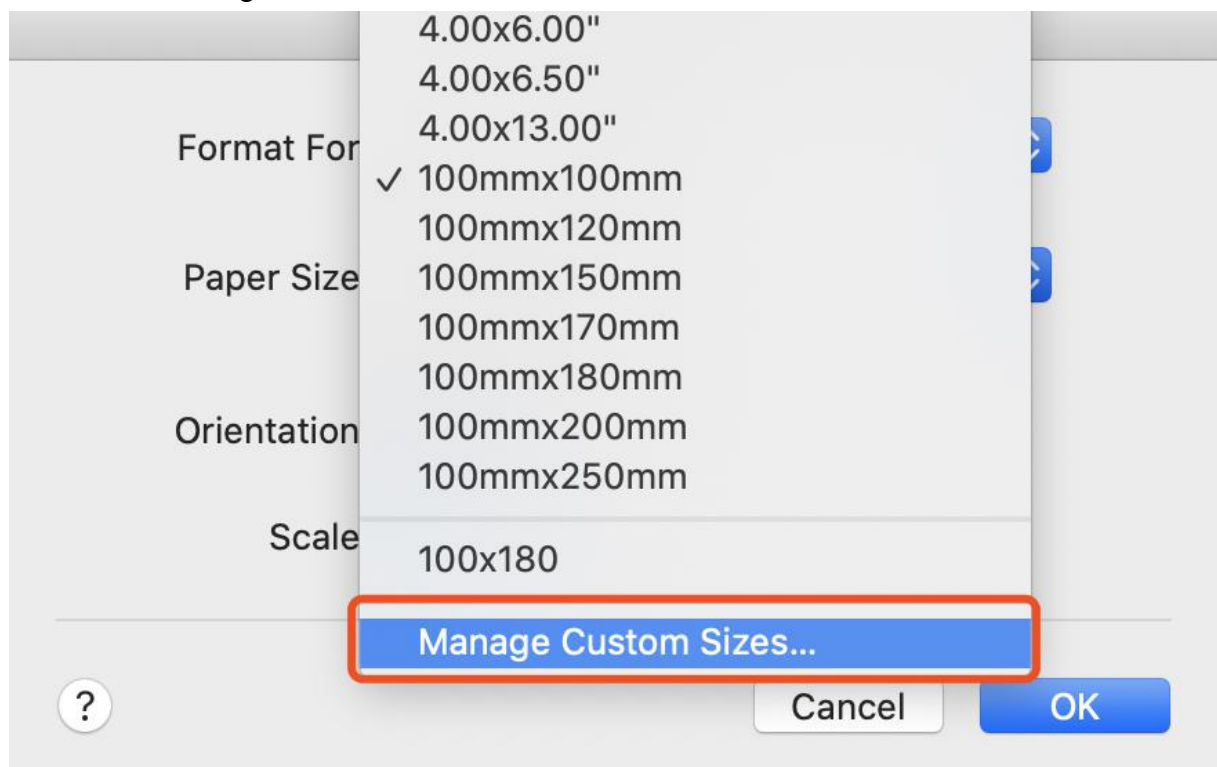

You can also make custom size and pls click "Manage Custom Sizes..." and it will show as below :

Click "+" and enter the size, please note that it is millimeter size. Then rename and click "OK"

The screenshot shows a dialog box for managing custom paper sizes. On the left, there is a list of custom sizes, currently showing 'Untitled'. Below the list are buttons for adding (+), removing (-), and duplicating. On the right, the 'Paper Size' is configured with a width of 215.9 mm and a height of 279.4 mm. The 'Non-Printable Area' is set to 'User Defined', with margins of 6.35 mm for the top, left, and right, and 14.11 mm for the bottom. At the bottom of the dialog are 'Cancel' and 'OK' buttons, along with a help icon (?) on the left.

Click “Printer...” and it will show as below :

Print

Printer: RP4xx Series





Presets: Default Settings

Copies: 1

Pages: ☒ All  
☐ From: 1 to: 1

Layout

Pages per Sheet: 1

Layout Direction:    

Border: None

Two-Sided: Off

☐ Reverse page orientation  
☐ Flip horizontally

? PDF Hide Details Cancel Print

Pls change the “Layout” into “Printer Features” and it will show as below:

Print

Printer: RP4xx Series

Presets: Default Settings

Copies: 1

Pages: ☒ All  
☐ From: 1 to: 1

Printer Features

Print Speed: 5.00 in/sec

Darkness: 7

Horizontal: 8

Vertical: 0

? PDF Hide Details Cancel Print

You can select the print speed(default setting is 5) and darkness(default setting is 7) and then "Print".